


BEAM CLAMP JG


Easy and simple mounting
 Special Clamp Jaw design applies loads away from flange edge
 Fits wide range of beams and flange widths, low headroom design
 Widely option for flange width

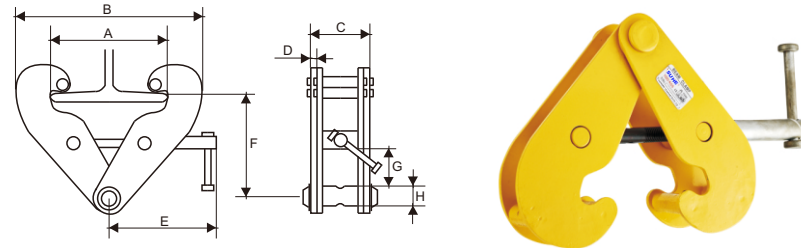

Model	Capacity kg	Flange Width mm	A Max. mm	B Min. mm	B Max. mm	C mm	D mm	E mm	F Min. mm	F Max. mm	G mm	H mm	Weight kg
JG-1	1000	75-230	278	180	370	62	5	230	100	160	30	25	4
JG-2	2000	75-230	278	180	370	67	6	230	100	160	35	28	4.4
JG-3	3000	80-320	356	230	480	100	8	260	125	210	45	32	8.6
JG-5	5000	80-320	356	230	480	110	10	260	125	210	50	38	10.7
JG-10	10000	80-320	356	255	490	115	12	270	170	240	65	43	14.5

BEAM CLAMP JBC


Easy and simple mounting
 Special Clamp Jaw design applies loads away from flange edge
 Fits wide range of beams and flange widths, low headroom design
 Widely option for flange width

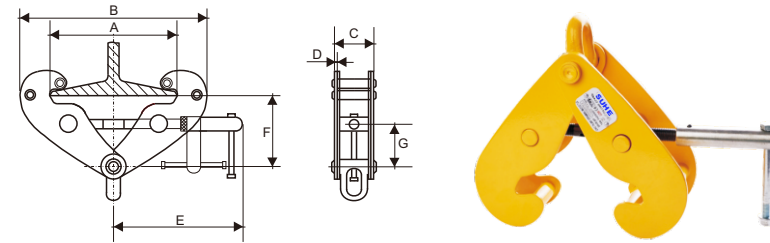

Model	Capacity kg	Flange Width mm	A Max. mm	B Min. mm	B Max. mm	C mm	D mm	E mm	F Min. mm	F Max. mm	G mm	Weight kg
JBC-1A	1000	75-245	270	183	375	66	4	210	102	165	25	3.5
JBC-2A	2000	75-245	270	183	375	74	6	210	102	165	25	4.5
JBC-3A	3000	70-355	365	240	520	103	8	258	135	225	45	9.5
JBC-5A	5000	70-355	365	240	520	111	10	258	135	225	45	11
JBC-10A	10000	80-350	365	250	520	120	12	280	160	230	50	16

BEAM CLAMP HEAVY DUTY

Special Clamp Jaw design applies loads away from flange edge
 Three supporting shaft provides stronger clamping force
 Safety factor 5:1

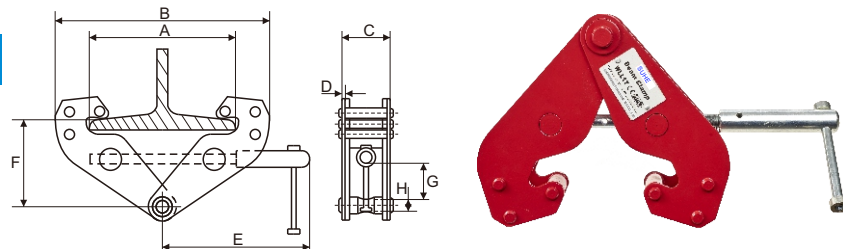

Model	Capacity kg	Flange Width mm	A Max. mm	B Min. mm	B Max. mm	C mm	D mm	E mm	F Min. mm	F Max. mm	G mm	Weight kg
HD-1A	1000	75-30	278	182	380	64	4	217	90	150	26	4.5
HD-2A	2000	75-230	278	182	380	76	6	217	90	150	25	5
HD-3A	3000	80-320	356	220	500	100	8	277	145	220	48	9.5
HD-5A	5000	90-320	356	220	500	112	10	277	145	220	45	11.3
HD-10A	10000	90-320	356	250	520	120	12	285	160	230	52	15.9