

**Ratchet tie down**



**Operation**

- 1.The hooks of the cargo lashing should be fixed on both sides of the truck.
- 2.Pull the handle, and the ratchet wheel will working accordingly, then the belt will gradually tighten up, to achieve the purpose of bundling goods.
- 3.When unload, pull the handle of hand puller, rotate the handle, gradually release the tension. Until the belt is in a relaxed situation, then you can unload the hooks of both sides and unload the goods.

**Technical specifications**

- According to EN12195-2:2000.
- Min. Breaking Strength (M.B.S) stripes: each stripe is equal to 1 tonne M.B.S.
- Each set is packed in plastic with CE declaration of conformity, other packing is available at order's request.
- The cargo lashing are not design for overhand lifting or towing.
- More than standard length is available at order's request.
- Different end fitting is available with different cost.




**PACKAGE OF CARGO LASHING**



Item Number	Width (mm)	W.L.L.		Min. Breaking Strength		Length (m)		N.W. (Kg)	Sets Per Carton	Dimension of Carton (cm)
		(Kgs)	(Lbs)	(Kgs)	(Lbs)	Fixed End	Loose End			
TCSH2501	25	150	330	450	990	0.5	2.5	0.38	90	49x30x29
TCSH2502	25	200	440	600	1320	0.5	2.5	0.40	85	49x30x29
TCSH2503	25	250	550	800	1650	0.5	2.5	0.42	80	49x30x29
TCSH2504	25	300	660	900	1980	0.5	2.5	0.43	75	49x30x29
TCSH2505	25	350	770	1000	2310	0.5	4.0	0.50	60	49x30x29
TCSH3801	38	500	1100	1500	3300	0.5	4.0	0.80	25	49x30x29
TCSH3802	38	650	1430	2000	4290	0.5	5.5	1.10	20	49x30x29
TCSH3803	38	800	1750	2500	5250	0.5	5.5	1.30	20	49x30x29
TCSH5001	50	1000	2200	3000	6600	0.5	7.5	2.00	12	49x30x29
TCSH5002	50	1150	2500	3500	7500	0.5	7.5	2.20	12	49x30x29
TCSH5003	50	1350	3000	4000	9000	0.5	7.5	2.40	12	49x30x29
TCSH5004	50	1500	3300	4500	9900	0.5	7.5	2.50	12	49x30x29
TCSH5005	50	1650	3600	5000	10800	0.5	7.5	2.60	12	49x30x29
TCSH7501	75	2250	5000	6800	15000	0.5	8.5	5.10	3	49x30x29
TCSH7502	75	2650	5800	8000	17400	0.5	8.5	6.30	3	49x30x29
TCSH10001	100	2250	5000	6800	15000	0.5	9.5	5.80	3	49x30x29
TCSH10002	100	2650	5800	8000	17400	0.5	9.5	7.00	3	49x30x29
TCSH10003	100	3350	7350	10000	22050	0.5	9.5	8.80	3	49x30x29

**Ratchet tie down belt**

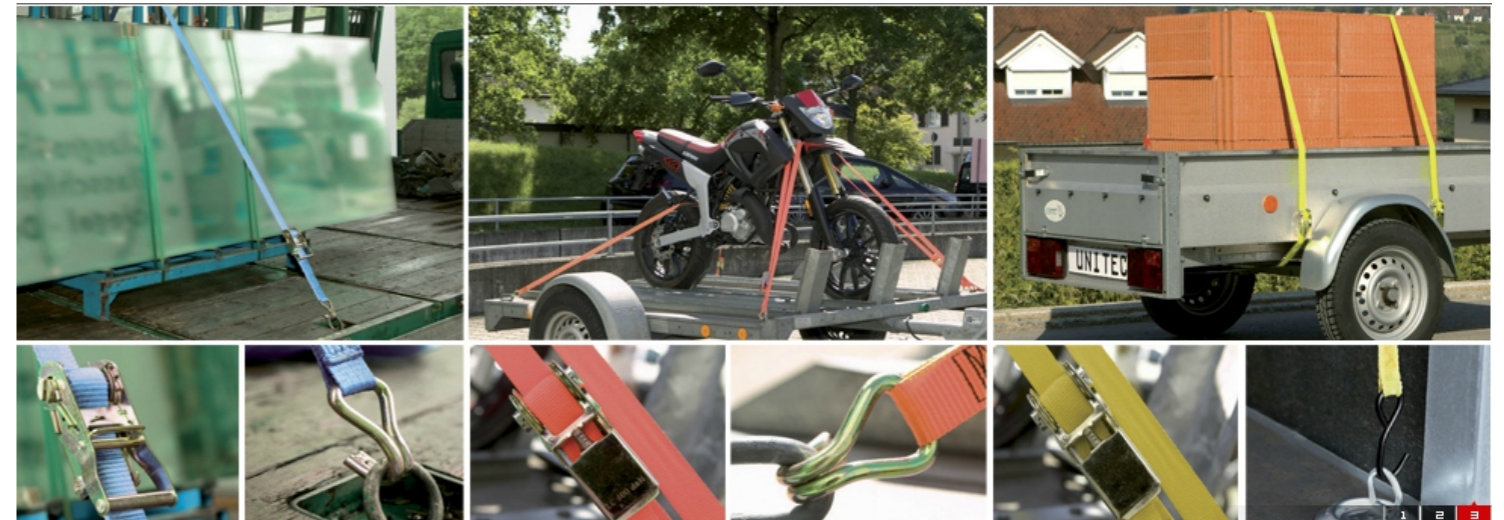

**WEBBING BELT FOR CARGO LASHING**

**Type**

- Belt for cargo lashing

**Technical specifications**

- Any colour depending order's request.
- Only for cargo lashing, not designed for overhead lifting or towing.
- Min. Breaking Strength (M.B.S) stripes: each stripe is equal to 1 ton (M.B.S.)
- Please be sure the M.B.S. required at the time of order.

**Characteristics**

**Low elongation**

Item Code	Belt Width (mm)	Assembly break Strength (kgs)	Webbing tensile strength (kgs)	Net weight of 200m (kgs)	Rolls Per Carton (rolls)	Dimension of Carton (mm)
TCSH2501	25	450	585	3.2	11	51x31x32
TCSH2502	25	600	750	4.0	10	51x31x32
TCSH2503	25	800	1000	4.7	10	51x31x32
TCSH2504	25	900	1125	5.3	8	51x31x32
TCSH2505	25	1000	1250	5.4	8	51x31x32
TCSH3801	38	1500	1875	8.3	7	51x31x32
TCSH3802	38	2000	2500	7.3	7	51x31x32
TCSH3803	38	2500	3125	14.1	7	51x31x32
TCSH5001	50	3000	3750	17.2	5	51x31x32
TCSH5002	50	3500	4375	19.8	4	51x31x32
TCSH5003	50	4000	5000	21.4	4	51x31x32
TCSH5004	50	4500	5625	23.6	3	51x31x32
TCSH5005	50	5000	6250	26.0	3	51x31x32
TCSH7501	75	6800	8500	35.5	2	51x31x32
TCSH7502	75	8000	10000	42.0	2	51x31x32
TCSH10001	100	6800	8500	35.5	4	51x51x41
TCSH10002	100	8000	10000	42.0	4	51x51x41
TCSH10003	100	10000	12500	52.6	4	51x51x41